



HI-STRENGTH PLASTIC STORAGE TANKS AND TANK SYSTEMS

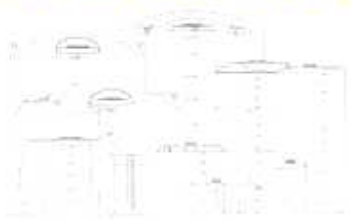

1-800-943-7880

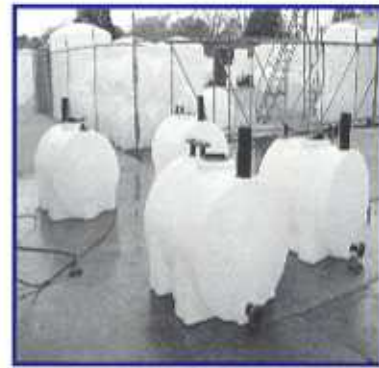

Polyethylene—Polypropylene—PVDF—Halar—Fiberglass Encased
thermoplastic resins for specific chemical compatibility
standard 1.9 specific gravity rating for superior strength and durability
3-Year Warranty—color resins on request

Fittings and Fabrication Options for Tanks


Fittings:

- bulkhead fittings—PVC, PP, stainless steel (1/2" - 4")
- polyethylene welded, threaded couplings (1/2" - 4")
- polyethylene welded flanges (ANSI 150#) (1/2" - 24")

Tank Options:

- insulation and heat tracing
- baffles for mixing
- pump mounts
- sight glasses
- ultrasonic level transmitter and fitting
- top fill lines
- bolted, hinged manways
- internal & external piping
- ladders
- vents
- plastic welding of specialty fittings

CUSTOM TANK ASSEMBLIES

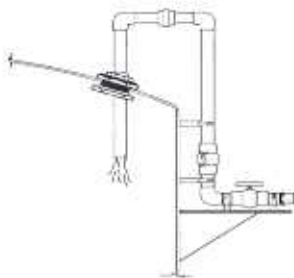

TANK STANDS & PLATFORMS



HUMBLETON INDUSTRIAL SALES, INC

Industrial Products—Intelligent Solutions

1-800-943-7880





www.humbletonindustrial.com

POLYETHYLENE VERTICAL CLOSED-TOP TANKS

GALLON CAPACITY	DIAMETER x HEIGHT	WEIGHT (lbs)	LID (")
25	18 x 31	17	5
40	18 x 43	21	5
50	23 x 35	23	5
75	23 x 50	35	5
100	31 x 38	40	8
120	28 x 54	50	8
145	25 x 73	50	8
160	28 x 69	60	8
175	31 x 60	65	8
200	31 x 69	70	8
250	31 x 86	80	8
265	31 x 91	80	8
300	35 x 78	90	8
300	48 x 45	90	8
500	48 x 68	120	8
550	46 x 83	125	8
650	46 x 97	165	8
700	48 x 98	180	8
800	69 x 75	230	16
1100	60 x 100	315	16
1200	63 x 96	300	16
1550	64 x 124	355	16
1550	87 x 65	290	16
2000	95 x 83	415	16
2500	95 x 100	530	16
3000	95 x 117	660	16
4200	102 x 131	950	16
5000	102 x 161	1400	16
6000	102 x 190	1500	16
10,000	142 x 168	2500	16
12,000	142 x 194	2900	16

POLYETHYLENE HORIZONTAL LEG TANKS and STANDS

CAPACITY (gal)	DIAMETER X LENGTH (")	WEIGHT (lbs)	LID (")	TANK STAND DIMENSIONS	WEIGHT (lbs)
15	15 x 15x 30	13	5		
25	19 x 15 x 30	17	5		
35	18 x 34.5	20	5		
65	24 x 39.5	35	5		
125	32 x 39	60	8	42 x 32 x 46	90
225	38 x 52	85	8	42 x 32 x 46	100
325	38 x 68	110	8	52 x 32 x 70	110
500	48 x 72	170	16	52 x 32 x 70	110
55 SADDLE	23 x 38	26	5		



POLYETHYLENE CONE BOTTOM TANKS with STANDS

CAPACITY (gal)	DIMENSIONS (")	WEIGHT (lbs.)	LID (")	HEIGHT w/STAND
200 x 45° cone	42 x 54	75	12	65"
300 x 45° cone	42 x 65	100	16	76"
350 x 45° cone	42 x 82	118	12	93"
500 x 45° cone	52 x 79	130	12	92"
1000 x 45° cone	64 x 98	250	16	112"
1200 x 15° cone	90 x 62	240	16	74"
1400 x 45° cone	64 x 132	340	16	146"
1600 x 30° cone	90 x 90	284	16	93"
1700 x 15° cone	85 x 83	284	16	96"
2500 x 15° cone	90 x 108	435	16	121"
2600 x 30° cone	90 x 125	500	16	128"
2600 x 45° cone	85 x 144	500	16	154"
3000 x 15° cone	90 x 125	550	16	137"

POLYETHYLENE RECTANGULAR MULTI-PURPOSE TANKS

POLYETHYLENE OPEN TOP TANKS *containment tanks available for all size*

CAPACITY (gal)	DIMENSIONS (LxWxH)	WEIGHT (lbs)	LID
16	21 x 14 x 17	12	5
25	34 x 14 x 12	17	8
50	38 x 25 x 14	35	5
50	41 x 26 x 15	40	8
65	20 x 18 x 36	48	4
85	36 x 24 x 24	40	Open top/lid
100	38 x 25 x 26	50	5
100	41 x 26 x 28	50	8
100	55 x 36 x 18	50	8
150	55 x 36 x 20	67	5
200	58 x 30 x 30	120	8
250	68 x 48 x 19	120	
300	58 x 30 x 44	130	8
500	102 x 81 x 20	150	Open top with supports
1000	102 x 81 x 40	400	Open top with supports

CAPACITY (gal)	DIAMETER X HEIGHT (")	WEIGHT (lbs)
55	22 x 41	27
100	28 x 45	40
150	31 x 51	52
200	36 x 50	60
350	56 x 34	90
500	56 x 49	120
900	85 x 41	175
1000	74 x 64	250
1350	85 x 60	217
1500	85 x 66	240
2200	90 x 84	36
3700	96 x 122	625


ACID NEUTRALIZATION TANKS

- capacities from 5-gallons to 3700-gallons
- polyethylene and polypropylene resins
- bolted lid
- dip-tube
- welded flanges and couplings
- acid waste connections
- pH monitoring systems
- limestone chips



DOUBLE CONTAINED AND HEATED TANK SYSTEMS

- all capacities quoted on request
- variety of transition fittings available
- full and open containment
- digital heat tracing systems
- polyurethane insulation
- level controls available



HIGH PURITY TANK SYSTEMS

- FDA approved resins
- variety of resins available
- 3A rated fittings available
- bolted lids



TANK and TANK SYSTEMS ACCESSORIES

Tank Level Indication:

- sight gauges
- buoyancy switches
- capacitance switches
- ultrasonic transmitters
- **new non-contact** capacitance switches

Valves:

- manual and actuated
- ball valves (through 6")
- butterfly valves (wafer and lug style)
- diaphragm valves
- gate valves
- solenoid valves
- PVC/CPVC pipe/fittings
- PVDF and polypropylene pipe/fittings

Pumps and Filters:

- air diaphragm pumps
- centrifugal pumps
- chemical dosing pumps
- chemical feed systems
- Y-strainers
- Manual & auto-mated filters

Instrumentation:

- mixers and mixer mounts
- flow meters
- mag-meters
- mass flow meters
- pH monitoring and control
- Conductivity & ORP transmitters
- residual chlorine

HUMBLETON INDUSTRIAL SALES, INC

Industrial Products—Intelligent Solutions

49 Duncan Circle, Hiram, Georgia 30141

1-800-943-7880 (Fax) 770-943-8574

www.humbletonindustrial.com